



OF Series LED Panel



DOOH Advertising Revolution

DOOH (Digital out-of-home) advertising is a key component for industry growth, while traditional OOH remains steady.





Ultra Slim & Light

Ultra slim & lightweight panels improve installation efficiency.





Fully Clad Aluminum Housing Design

5VB Flame Retardant

Unlike traditional plastic housing, the fully clad aluminum design allows the display to function properly in hot and environments.










All-Weather Stability

Ingress Protection


High waterproof protection from the front and back results in more secure and steady performance all the time.

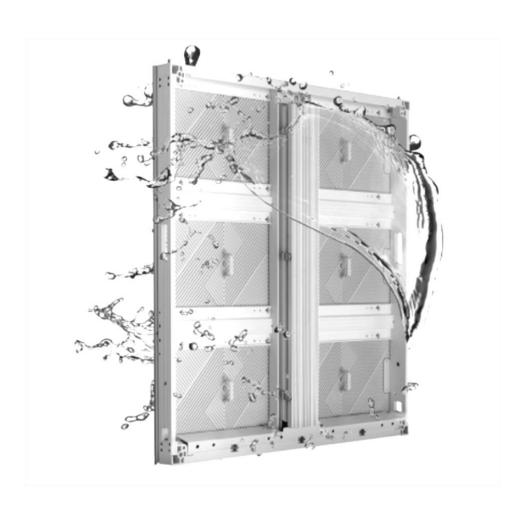



Double Serviceability

Supports both front & rear installation and maintenance with universal modules.

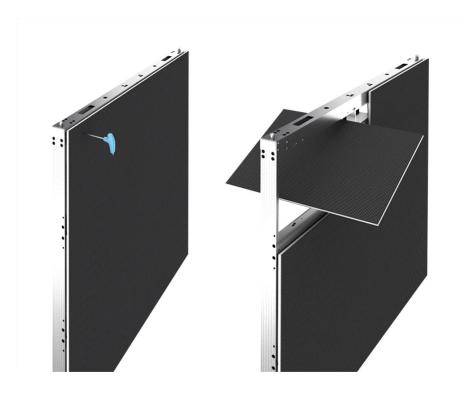



Direct Connections

Direct connections between modules and HUB, free of flat ribbon cables for a greater level of stability.





Creative Splicing

45 $\,^\circ$ bevel is optional to splice L shapes, cubes and etc. to realize more creativity.

* if need bevel design let sales know before placing order





Market Trends

Naked Eye 3D Solution

L-shaped and curved splicing get better naked eye 3D Effect








High Energy Efficiency

Good Heat Disspation


Applying dual-channel voltage input to reduce power consumption to improve conversion efficiency

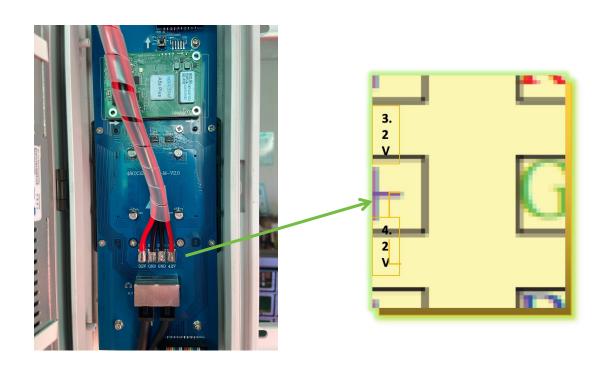




Installation

Flexibility to choose the best installation method according to the construction site.

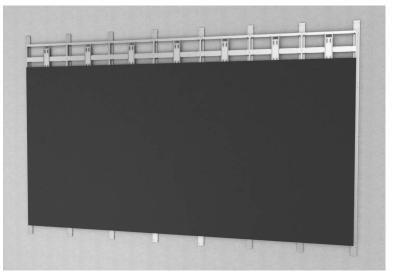

Bracket

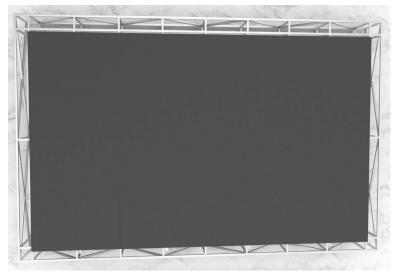

Steel Structure





Model	OF-5	OF-6	OF-8	OF-10
Pixel Pitch	5.7mm	6.67mm	8mm	10mm
LED Encapsulation	SMD2727	SMD2727	SMD2727	SMD2727
Cabinet Resolution	168x168dots	144x144dots	384x288dots	344x258dots
Brightness	>6,500nits	>6,500nits	>6,500nits	>6,500nits
Viewing Angle	160 ° H 140 ° V			
Refresh Rate	3,840Hz +/-	3,840Hz +/-	3,840Hz +/-	3,840Hz +/-
Panel Size	960mm x 960mm	960mm x 960mm	960mm x 960mm	960mm x 960mm
Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum
Weight	28kg	28kg	28kg	28kg



Application



